

CMOS Logic: 2-input CMOS NAND Gate

■ General Description

The LN74SZ00 is a 2-input CMOS NAND gate, manufactured using silicon gate CMOS fabrication. CMOS low power circuit operation makes high speed LS-TTL operation achievable. As the LN74SZ00 is integrated into mini molded, SOT-353/SOT23-5L package, high density mounting is possible.

With a wave forming buffer connected internally, stabilized output can be achieved as the circuit offers high noise immunity.

■ Features

- High speed operation : tpd = 2.6ns (TYP.)

■ Functions

Input		Output
A	B	Y
L	L	H
L	H	H
H	L	H
H	H	L

H=High Level

L=Low Level

■ Pin Configuration

Pin Number	Pin Name	Function Description
1	B	Input B
2	A	Input A
3	GND	ground
4	Y	Output Y
5	Vcc	Power supply

■ Ordering Information

Product name	Package	Mark	Symbol
LN74SZ00KR	SOT-353	Z00K	NAND2
LN74SZ00MR	SOT23-5L	Z00M	NAND2

- Operating voltage range : 1.2V ~ 6.0V
- Low power consumption : 1 μ A (MAX.)
- CMOS 2-Input NAND gate
- Ultra small package : SOT-353
SOT23-5L

■ Applications

- Palmtops
- Digital equipment
- Portable electronic products

■ Package

- SOT-353/SOT23-5L



(Top View)

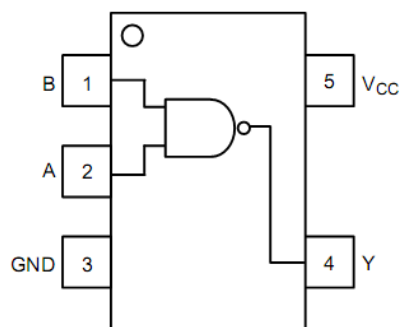


Fig 1. Pin Configuration

■ Absolute maximum ratings

Supply Voltage-----	-0.5V to 7V
Output Voltage -----	-0.5V to Vcc+0.3V
Input Voltage-----	-0.5V to 7V
Output Current-----	±25mA
Ground Current-----	±50mA
Storage Temperature Range -----	-65°C to 150°C
Lead Temperature(Soldering)-----	260°C
Power Dissipation P _D (On PCB Board, 25)	
SOT-353-----	150mW
SOT23-5L-----	250 mW


■ Recommended operating environment

Supply Voltage -----	2V to 5.5V
Output Voltage -----	0V to Vcc
Input Voltage -----	0V to Vcc
Operating temperature-----	-40°C to 85°C
Output Current-----	±4mA@3V
Output Current -----	±8mA@4.5V
Input signal rise and fall time-----	0-100ns/V@3.3V
Input signal rise and fall time -----	0-20ns/V@5.0V


Electrical Characteristics

Parameter	Symbol	Voltage(V)	Conditions	Ta=25℃			Ta=-40-85℃		Unit	
				Min	Typ	Max	Min	Max		
Input voltage	V _{IH}	1.2		0.9	—	—	0.9	—	V	
		2.0		1.5	—	—	1.5	—		
		3.0		2.1	—	—	2.1	—		
		5.5		3.85	—	—	3.85	—		
	V _{IL}	1.2		—	—	0.3	—	0.3	V	
		2.0		—	—	0.5	—	0.5		
		3.0		—	—	0.9	—	0.9		
		5.5		—	—	1.65	—	1.65		
Output voltage	V _{OH}	2.0	V _{IN} =V _{IH}	IOH=-50μA	1.9	2.0	—	1.9	—	V
		3.0			2.9	3.0	—	2.9	—	
		4.5	Or V _{IN} =V _{IL}	IOH=-4mA	4.4	4.5	—	4.4	—	
		3.0			2.58	—	—	2.48	—	
	4.5	V _{IN} =V _{IH}	IOH=50μA	3.94	—	—	3.80	—		
	2.0			—	—	0.1	—	0.1	V	
	3.0			—	—	0.1	—	0.1		
	4.5			—	—	0.1	—	0.1		
	3.0			—	—	0.36	—	0.44		
	4.5			—	—	0.36	—	0.44		
Input current	I _{IN}	0-5.5	V _{IN} =V _{CC} or GND	-0.1	—	0.1	-1.0	1.0		μA
Quiescent current	I _{CC}	5.5	V _{IN} =V _{CC} or GND, I _{OUT} =0μA	—	—	1	—	10	μA	
Delay time	t _{PLH}	3.3	C _L =15pF	—	3.7	7.9	1.0	9.5	nS	
			C _L =50pF	—	5.4	11.4	1.0	13.0		
		5.0	C _L =15pF	—	2.7	5.5	1.0	6.5		
			C _L =50pF	—	3.6	7.5	1.0	8.5		
	t _{PHL}	3.3	C _L =15pF	—	3.3	7.9	1.0	9.5		
			C _L =50pF	—	4.6	11.4	1.0	13.0		
		5.0	C _L =15pF	—	2.5	5.5	1.0	6.5		
			C _L =50pF	—	3.5	7.5	1.0	8.5		
Input capacitance	C _{IN}	5.0	V _{IN} =V _{CC} or GND	—	2	10	—	10	pF	
Power dissipation capacitance	C _{PD}	—	No Load, f=1MHz	—	9.3	—	—	—	pF	

■ Timing Chart

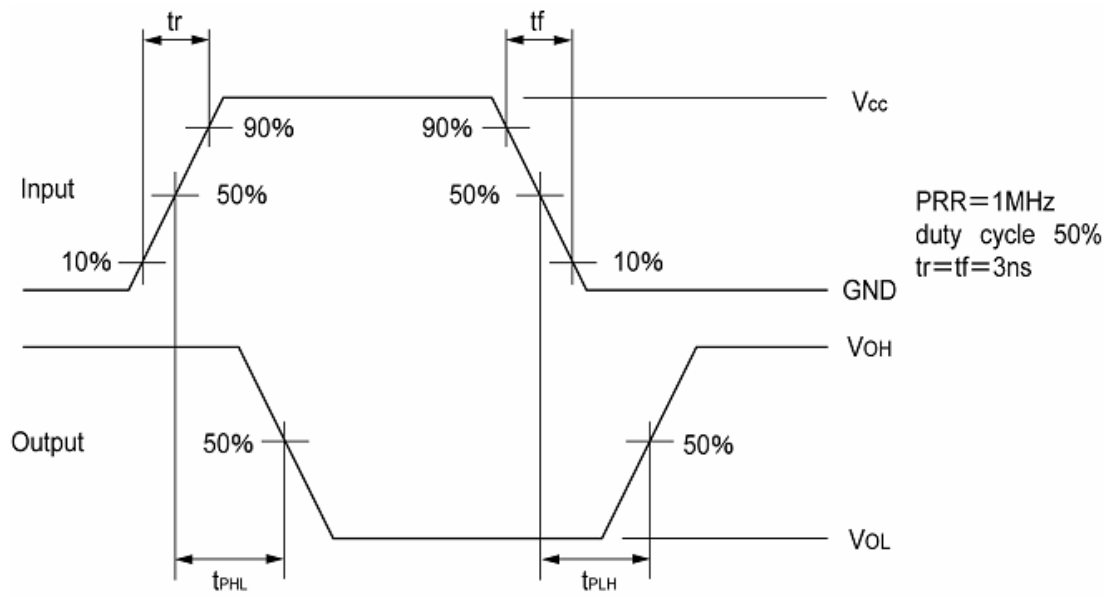


■ Test Circuit

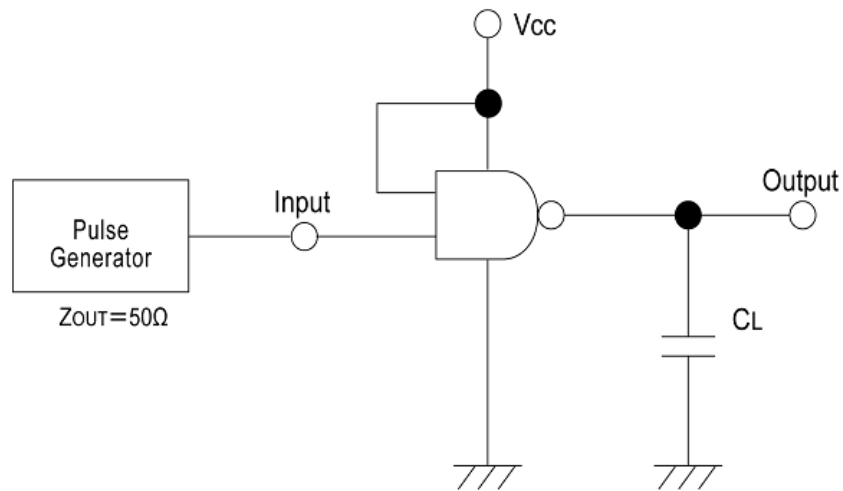

Note: Open output when measuring supply current


Package Information

- SOT-353

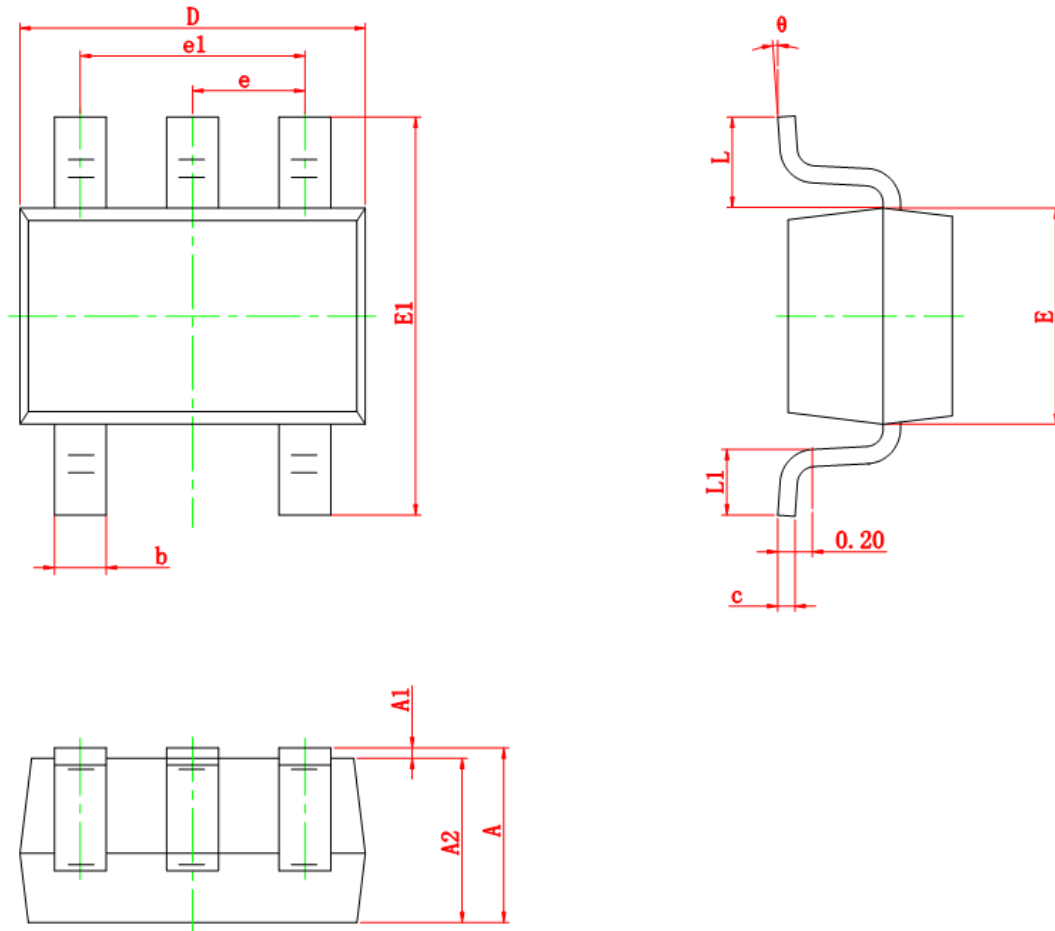

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.100	0.035	0.043
A1	0.000	0.100	0.000	0.004
A2	0.900	1.000	0.035	0.039
b	0.150	0.350	0.006	0.014
c	0.080	0.150	0.003	0.006
D	2.000	2.200	0.079	0.087
E	1.150	1.350	0.045	0.053
E1	2.150	2.450	0.085	0.096
e	0.650 TYP		0.026 TYP	
e1	1.200	1.400	0.047	0.055
L	0.525 REF		0.021 REF	
L1	0.260	0.460	0.010	0.018
θ	0°	8°	0°	8°

- SOT23-5L

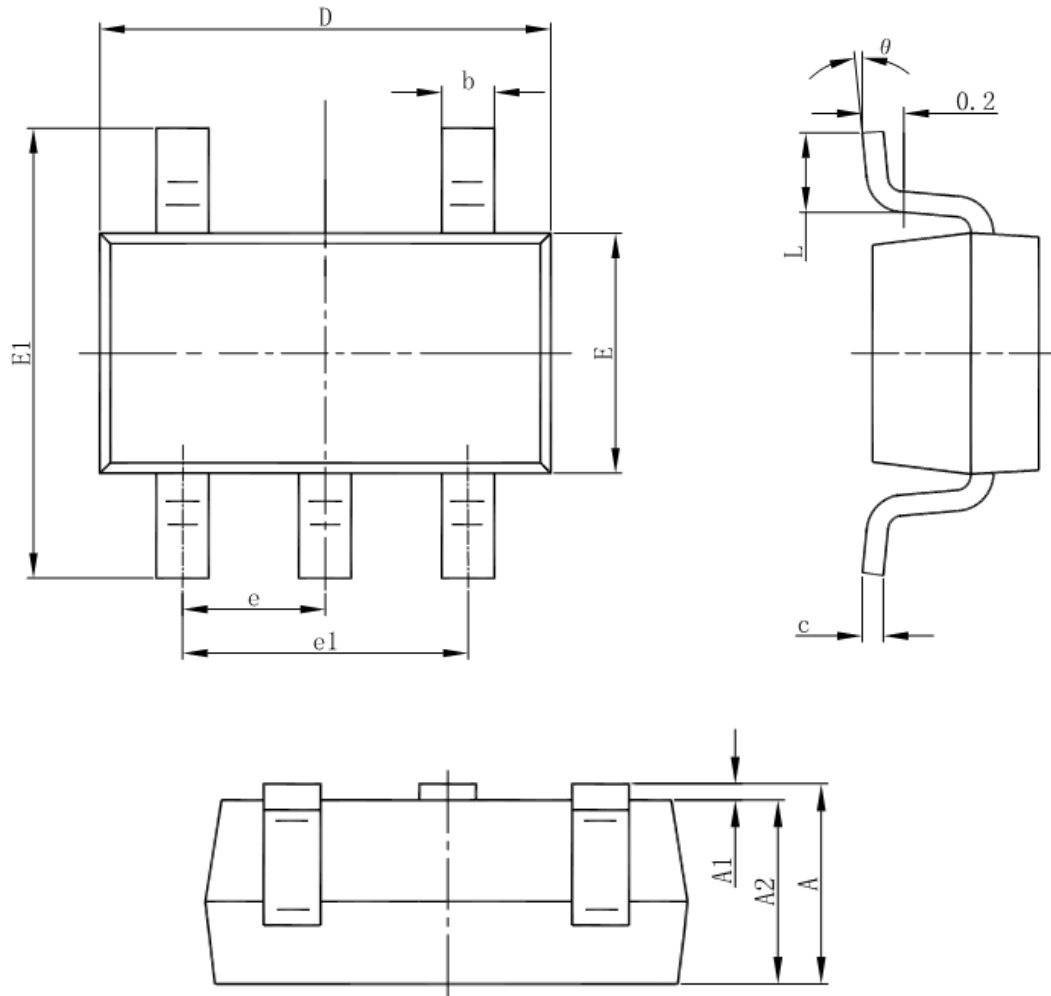

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°